


## Pressure Washer Hose and Assembly



- 1- Synthetic Rubber Tube
- 2- One or Two High Tensile Steel Wire Braids
- 3- Synthetic Rubber Cover

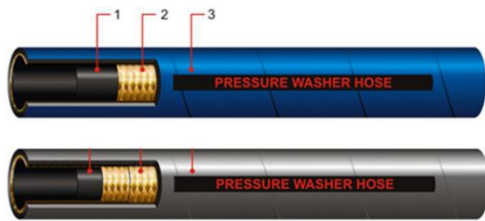

### Construction:

- Tube is oil resistant, synthetic rubber
- Cover is oil and weather resistant synthetic rubber
- Reinforcement is one or two braids of high tensile steel wire

### Operating Temperature:

- -40° F / +212° F, Intermittent use up to 250° F

### Application:

- Water pressure-washing
- Mineral oils, vegetable and rape seed oils, glycol and poly glycol base oils, synthetic ester based oils, oils in aqueous emulsion, water, diesel fuel, gasoline

\* **Fitting:** One is male NPTF rigid and the other end is male NPTF swivel.

\* **Bend Restrictor:** As usual, black color is for 1 wire hose (4000psi) and red color is for 2 wires (6,000psi)

Part Number	Hose I.D.	Hose O.D.		Working Pressure	Burst Pressure	Min. Bend Radius		Weight	Termination
	(in)	(in)	(mm)			(psi)	(psi)		(in)
LH-PWH-04-4K	1/4	0.52	13.1	4,000	12,000	3.9	100	0.12	MNPTF-04-04
LH-PWH-04-6K	1/4	0.58	14.7	6,000	24,000	3.9	100	0.2	MNPTF-04-04
LH-PWH-06-4K	3/8	0.74	18.7	4,000	12,000	5.1	130	0.27	MNPTF-06-06
LH-PWH-06-6K	3/8	0.74	18.7	6,000	20,000	5.1	130	0.27	MNPTF-06-06
LH-PWH-08-4K	1/2	0.85	21.7	4,000	12,000	7.1	180	0.33	MNPTF-08-08
LH-PWH-08-5K	1/2	0.85	21.7	6,000	18,000	7.1	180	0.33	MNPTF-08-08

### ***Coupled Assemblies In Stock!***

AHG can supply coupling configurations to compliment your hose requirements. We have a large selection of couplers, adaptors and hose accessories in stock and ready to ship.